



Redefining Patient Handling

Classic Lifts



[Joerns.co.uk](http://Joerns.co.uk)

# Oxford Classic Mobile Lifts

Bringing together over 50 years of design and development, the Oxford Classic range of mobile lifts is ideally suited to homecare, nursing and acute environments, where our products have been leading the way for decades.





## Joerns Oxford® Mini

The Oxford Mini has been developed especially with the homecare environment and patient in mind. This compact but highly durable lift offers superb manoeuvrability around the confines of domestic and nursing settings where space is at a premium. Available in electric and hydraulic versions.

**Safe Working Load:** 140 kg / 22 st.

## Joerns Oxford® Midi

The Oxford Midi has become the 'gold standard' in homecare, offering surprising performance for a hoist of its size. The Midi offers the perfect solution for community and nursing environments, whilst being sympathetic to the space constraints it might encounter. Available in electric and hydraulic versions.

**Safe Working Load:** 180 kg / 27 st



## Joerns Oxford® Major

The Oxford Major is the perfect cross over product for both nursing and acute care environments. Its high lifting capacity and lightweight design allow the Major to work well in almost all settings. Available in electric and hydraulic versions.

**Safe Working Load:** 200 kg / 31 st

## Joerns Oxford® Maxi


With a maximum lift height from the floor of almost two metres, the Maxi can lift patients onto almost all acute and nursing surfaces. Remarkably, the Maxi maintains a relatively compact frame (no larger than the Major 200 in width and length), allowing the hoist to be manoeuvred and stored with relative ease. Electric only.

**Safe Working Load:** 180 kg / 27 st



# Product Highlights

Our latest products bring together all of our experience in design and development to bring you our most functional and high performing mobile lift range ever. With key features and functionality shared throughout the range, our lifts are both simple to use and easy to train with.

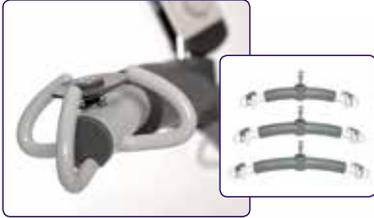

## Interchangeable Spreader Bars

Available in three sizes, small, standard and large to accommodate a wider variety of patient shapes and sizes.



## Emergency Descent

Manually operated emergency descent function for increased patient safety.



## Over-sized Push Handle

Optimised position and ergonomically designed for ease of manoeuvrability.



## Digital Weigh-Scale

An optional class III rated digital weigh-scale is available on all classic mobile lifts for easy and accurate patient monitoring.



## Foot Pedal Leg Adjustment

The ergonomically designed foot pedal is perfectly positioned to ensure the user's foot remains level during operation, helping to avoid risk of injury.



## High Grade Tente® Castors

A highly durable design that aids manoeuvrability over the majority of floor surfaces. The rear castors incorporate an easy to operate brake pedal (as shown).



# Oxford Smart™ Monitor

The Mini, Midi, Major and Maxi (electric versions) incorporate the unique Smart™ Monitor.

The Smart™ Monitor control system records the exact amount of work completed by the actuator each and every time the lift is used, regardless of a patient's weight or lift height covered. The intelligent system advises the user to schedule key maintenance helping to ensure your lift remains in optimum condition.



## Key Features

- Accurately identifies service interval periods
- Intuitive, easy-to-use controls
- Fully reprogrammable to allow retro-fits on existing fleets
- Identifies total number of actuations and work completed
- Identifies lift over-loads (exceeding safe working load)
- Easy to use, on-board redundant controls
- Battery level indicator



- ✓ Improved patient safety
- ✓ Optimised product lifetime
- ✓ Simple service & maintenance

# Technical Specifications

Specification	Mini 140	Midi 180	Major 200	Maxi 180
Safe Working Load	140 kg / 22 st	180 kg / 27 st	200 kg / 31st	180 kg / 27 st
Length	1175 mm	1225 mm	1300 mm	1315 mm
Maximum Overall Height	1730 mm	1840 mm	1930 mm	2150 mm
Minimum Overall Height	1230 mm	1240 mm	1380 mm	1560 mm
Maximum Spreader Bar Height	1545 mm	1660 mm	1725 mm	1970 mm
Minimum Spreader Bar Height	530 mm	525 mm	525 mm	780 mm
Spreader Bar Height a Maximum Reach	1000 mm	1060 mm	1200 mm	1420 mm
Spreader Bar Reach at Maximum Height	400 mm	420 mm	630 mm	550 mm
Spreader Bar Reach at Minimum Height	400 mm	440 mm	490 mm	540 mm
Maximum Reach	565 mm	655 mm	720 mm	730 mm
Turning Radius	1150 mm	1235 mm	1310 mm	1310 mm
Legs Open - External Width	1060 mm	1170 mm	1230 mm	1230 mm
Legs Open - Internal Width	1000 mm	1070 mm	1140 mm	1140 mm
Legs Closed - External Width	600 mm	600 mm	660 mm	660 mm
Legs Closed - Internal Width	540 mm	540 mm	580 mm	580 mm
Overall Height of Legs	100 mm	100 mm	100 mm	100 mm
Ground Clearance	25 mm	25 mm	15 mm	15 mm
Front Twin Castors	75 mm	75 mm	75 mm	75 mm
Rear Braked Castors	100 mm	100 mm	100 mm	100 mm

Weights	Mini 140	Midi 180	Major 200	Maxi 180
Mast and Boom Assembly	17.5 kg	20.5 kg	23 kg	24 kg
Base Assembly	11 kg	11.5 kg	19 kg	19 kg
Total	28.5 kg	32 kg	42 kg	43 kg

Specifications may vary due to manufacturing tolerances

## Electrical Specifications

Battery 1 x 24 volt rechargeable sealed lead acid type  
 Battery capacity 2.9 Ampere hours  
 Charger rated input 100 - 240 V AC / 50 / 60 Hz  
 Charger rated output 29.5 V DC Max 19W / IPX5

## Electrical Shock Protection

Charger - Class II  
 Lift - Internal Power Source

## Degree of Shock Protection

Charger - Type B  
 Lift - Type B

## Intended operating environment

>+5° <+40°. Outside this environment functionality and safety may be compromised.

## Warranty

Oxford Classic lifts come with a 12 month warranty as standard.  
 Please refer to your user manual for further information.

